
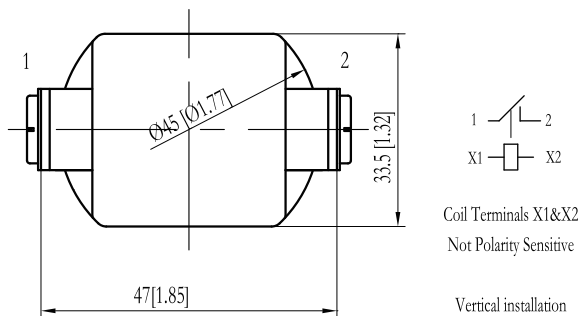


V20

- Low and stable contact resistance minimizes the loss in RF circuits
- Easily mounting in any axis and to the panel

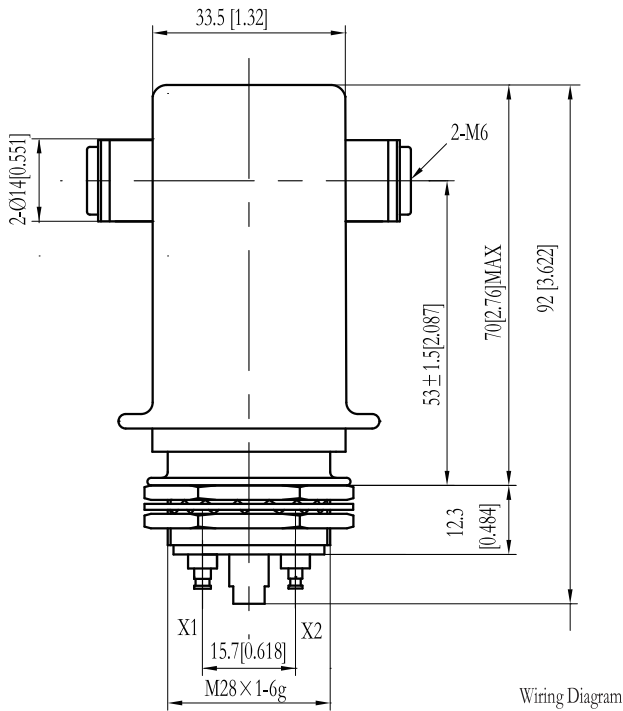

※ : Order the relay with the coil voltage in the part number as shown above. The coil voltage will appear on the coil plate near the coil terminals rather than in the pin on the relay.
 ※ ※ : Consult factory for load switching applications.

PRODUCT SPECIFICATIONS

Item	Unit	Value	
Contact Form	—	X	
Contact Arrangement	—	SPST-NO	
Maximum Peak Test Voltage, Contacts and to Base (15µA Leak Current Max.) dc or 60Hz	kV	35	
Contact Material (moveable/stationary)		molybdenum /copper	
Maximum Peak Operating Voltage, Contacts and to Base (15µA Leak Current Max.)	dc or 60Hz	kV	35
	2.5MHz	kV	22
	16MHz	kV	12
	32MHz	kV	10
Current, Load Switching ※ ※		Contact factory	
Current, Continuous Carry Max	dc or 60Hz	A	110
	2.5MHz	A	60
	13.56MHz	A	40
	32MHz	A	30
Coil Hi-Pot (V RMS, 60 Hz)	V	500	
Capacitance	Across Open Contacts	pF	2.5
	Contacts to Ground	pF	2.5
Operate Time	ms	18	
Release Time	ms	10	
Resistance, Contact Max @ 1A, 28 Vdc	Ω	.005	
Operating Temperature Ambient	°C	-55 ~ +125	
Shock, Operating, 1/2 Sine 11ms (Peak)	G's	50	
Vibration, Operating, Sine (10-2000 Hz Peak)	G's	10	
Life, Mechanical	Cycles	2 million	
Weight, Nominal	g(oz)	345(12)	

COIL RATINGS

Nominal, Volts dc	12	26.5	115
Pick-up, Volts dc, Max.	8	16	80
Drop-Out, Volts dc	.5~5	1~10	5~50
Coil Resistance (Ω ±10%)	24	120	2000

※ Ratings Listed are for 25°C, Sea Level Conditions

PART NUMBER SYSTEM

Series: High Voltage/Power **V20** — **W** **P** — **12 Vdc**

Terminal Connections

Contact Leads Out: W=Screw

Mounting: P=Through Panel

Coil Voltage ※: Blank=26.5Vdc, -12Vdc=12Vdc, -115Vdc=115Vdc